

Configure La Fonera under Mac OS

The problem is Mac OS doesn't support the WPA/WPA2-mixed-Mode configured in La Fonera by default.

This text describes how to solve this issue.

Connect your La Fonera directly with the LAN-Cable with your computer. Then follow these steps:

1. Open the system-configuration and enter the network neighbourhood
2. Create a new Neighbourhood and call it FON for example
3. Click on show and choose „Ethernet (integrated)“
4. Click on configuration and choose manual
5. Type in the correct values. These are
 - IP-Address: 169.254.255.2
 - Subnetmask: 255.255.255.0...all other fields can be left blank
6. Save the configurations
7. In your browser it should be now possible to reach <http://169.254.255.1>. The management-console will open.

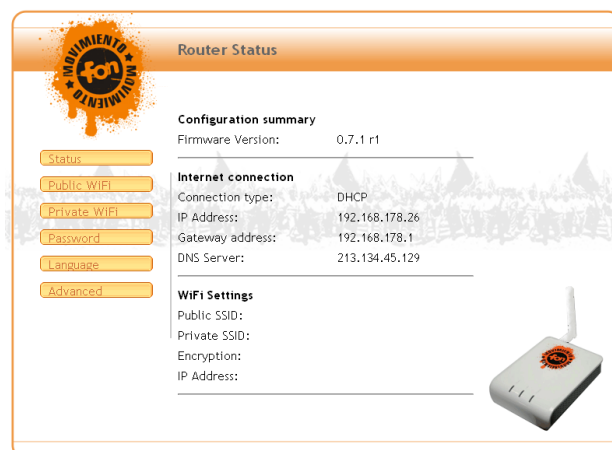


Abbildung 1: Management-console

8. Click on Private WiFi

9. You will be asked for an username and password. This is both „admin“ by default.



Abbildung 2: Username and password

10. After confirming with OK the following page will be showed.

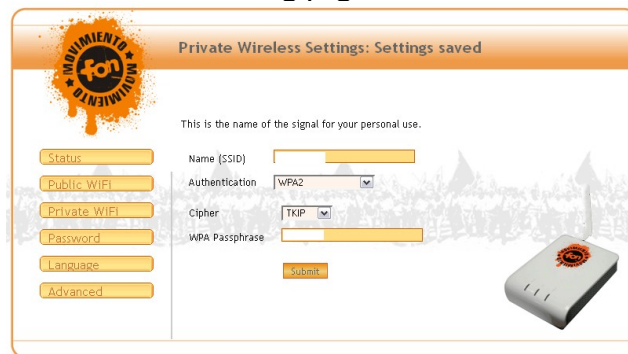


Abbildung 3: Private WiFi configuration

11. Configure your page as the one shown above. The SSID and the WPA Passphrase can be chosen freely. Be sure to not forget the passphrase.

12. Confirm the changes with the Submit-Button.

After clicking on Submit wait moment for the page to redisplay, then disconnect the powersupply for a couple of seconds. Be sure that the LAN-Cable of La Fonera is reconnected to your existing Internet-Router, then reconnect the powersupply.

Now La Fonera should connect with the Mac via WLAN/AirPort without any problems.